


EK S E R I E S

Dry Rotary Vane Vacuum Pumps

EKS - 10A & 10AH

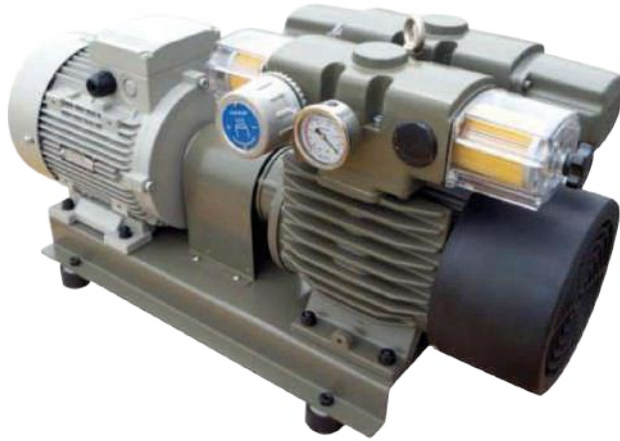

Single Stage, Carbon Vane Rotary, Air Cooled.

- Compact Design - Reliability & Durability
Easy to maintain and operate.
- Simple Installation - Air Cooled No Water Required - Oil Free.
- Quiet Operation.
- Direc Coupling Drive

Standard Equipment: Carbon Vanes, Built-in particulate Filter & Silencer, Vibration Isolators, Vacuum gage and Regulator, TEFC High Efficiency Motor.

Optional Equipment: Pressure gauge & regulator for blow operation.



• Specifications:

Models			EKS - 10A	EKS - 10AH
Displacement	60Hz	l/min	2350	2350
End Vacuum	mm HgG		670	740
Normal Operating Vacuum	mm HgG		410	600
Normal Operating Pressure	Kgf / cm ²		0.5	0.7
Motor	Kw		4	4
Pump Revolution	60Hz	RPM	1175	1175
Operating Amb. Temp.	°C		0 ~ 40 °C	
Connections	Intake(G-Bsp)		1 - 1/4"	1 - 1/4"
Driven			Via Coupling	
Weight	kg (with motor)		120	120

EKS SERIES Dry Rotary Vane Vacuum Pumps

EKS - 10A & 10AH

• Performance Curve

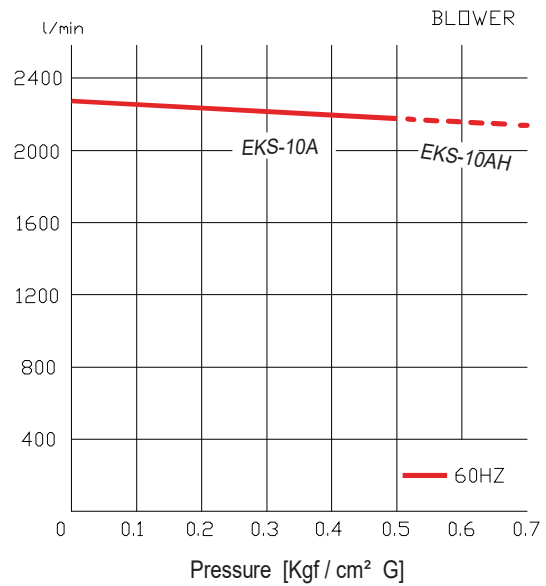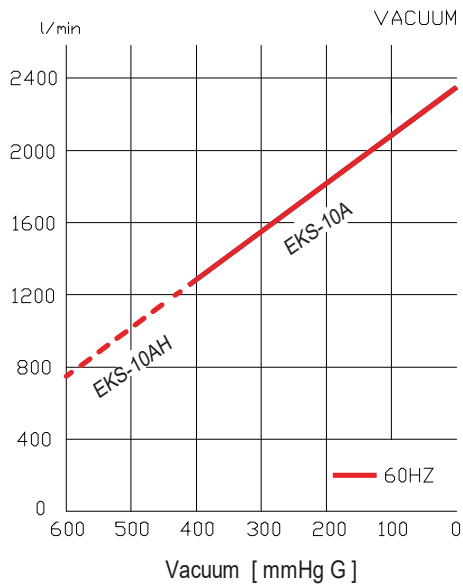

• Dimensions

